

**USBR2 – Converter USB to 2 x RS485 plus 14 VDC power output**

Baud Rate of each RS485 port up to 230 kbaud

Total throughput up to 40 kBytes/c

Current on 14 VDC output 0 ... 110 mA

Ripple on 14 VDC output less 50 mVp-p

14 VDC On-Off control by DTR

Galvanic isolation - No

Connectors - micro USB and terminal blocks for wire gauge 0,14 - 2,5 mm<sup>2</sup>

Dimensions 56 x 31 x 25 mm

Drivers for Windows XP, Windows Vista, Windows 7, Windows 8, Windows 10, Mac OS 8, Mac OS 9, Mac OS X, Linux, Windows CE.NET;

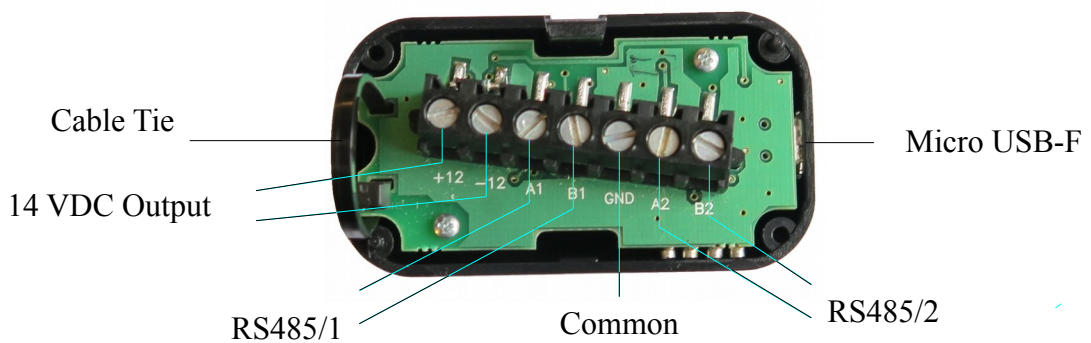


Fig. 1. Open lid converter. Connectors

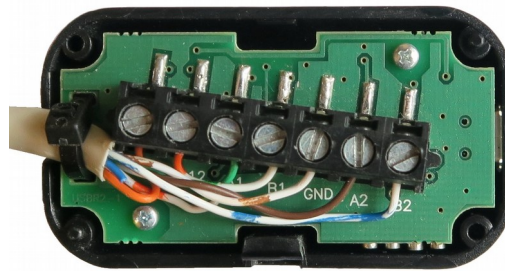


Fig. 2. Cable installation



Fig. 3. Closed lid converter